


Speed per Milliwatt Ratios for Floating-Point Packaged Processors

Updated February 2011

Copyright © 2011 Berkeley Design Technology, Inc.

No reproduction or reuse is permitted without the express authorization of BDTI.

See page 2 for details.

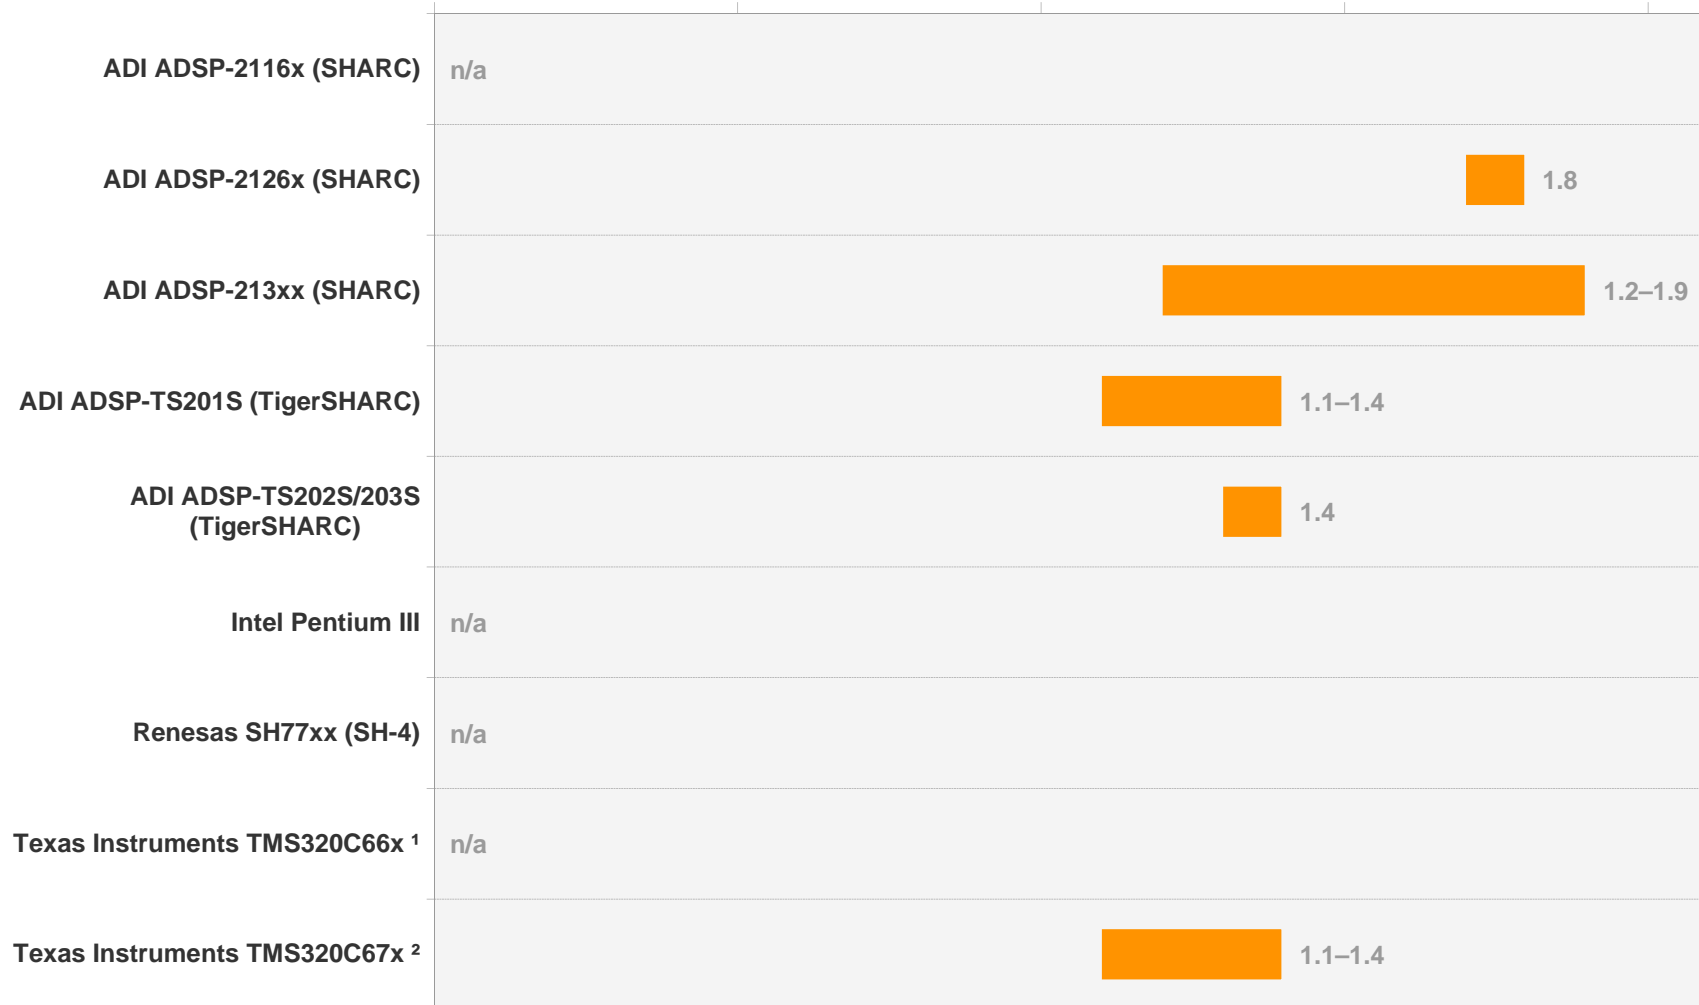

¹ Score for one core

² Score does not apply to TMS320C67x+ parts (e.g., the TMS320C672x)

All processors benchmarked with 32-bit floating-point data.

BDTIsimMark2000™ scores may be based on projected clock speeds. For information, see www.bdti.com/Services/Benchmarks.

■ BDTImark2000™/mW

■ BDTIsimMark2000™/mW

Speed per Milliwatt Ratios for Floating-Point Packaged Processors

Updated February 2011

Copyright © 2011 Berkeley Design Technology, Inc.

No reproduction or reuse is permitted without the express authorization of BDTI.



Processor Family	Clock Rate (min-max)	BDTImark2000™, BDTIsimMark2000™ (min-max)	Power (min-max)	BDTImark2000™/mW, BDTIsimMark2000™/mW (min-max)
ADI ADSP-2116x (SHARC)	100–110 MHz	550–600	n/a	n/a
ADI ADSP-2126x (SHARC)	150–200 MHz	820–1090	450–600 mW	1.8
ADI ADSP-213xx (SHARC)	200–400 MHz	1020–2050	n/a	1.2–1.9
ADI ADSP-TS201S (TigerSHARC)	500–600 MHz	3730–4480	2583–3907 mW	1.1–1.4
ADI ADSP-TS202S/203S (TigerSHARC)	500 MHz	3620	2583 mW	1.4
Intel Pentium III	1400 MHz	3130	n/a	n/a
Renesas SH77xx (SH-4)	333–400 MHz	1040–1250	n/a	n/a
Texas Instruments TMS320C66x ¹	1000–1500 MHz	8570–12860	n/a	n/a
Texas Instruments TMS320C67x ²	150–300 MHz	750–1500	533–1372 mW	1.1–1.4

¹ Score for one core

² Score does not apply to TMS320C67x+ parts (e.g., the TMS320C672x)

All processors benchmarked with 32-bit floating-point data.

BDTImark2000™, BDTIsimMark2000™: The BDTImark2000™ and BDTIsimMark2000™ provide a summary measure of signal processing speed. BDTIsimMark2000™ scores may be based on projected clock speeds. For information see www.BDTI.com/Services/Benchmarks.

Note: In general, BDTImark2000™/mW and BDTIsimMark2000™/mW scores cannot be computed from the speed and power data presented here. For example, the fastest processors are not always the highest-power processors. Therefore, it is not always possible to calculate a speed per milliwatt ratio by dividing the maximum speed for a family by the maximum power for the family.